

PROVEN PERFORMANCE

Modern Design



RUTG/RUTG-R Series
Non-Condensing Tankless

DELIVERING
DURABILITY



These products meet a stringent set of our company's internally defined sustainability standards.¹

[Ruud.com/MoreHotWater](https://www.ruud.com/MoreHotWater)

RELY ON



Performance You Trust in a New

Delivers the Performance Homeowners Want

With the same proven performance both plumbers and homeowners trust, the Ruud® RUTG/RUTG-R Series High Efficiency Non-Condensing Tankless Water Heaters now offer a new modern design. These smaller, lighter units were designed with contractors in mind to make one-person installation and servicing even easier while saving the homeowner money and energy. Plus, enhanced features deliver the continuous hot water and energy efficiency homeowners want.



Earth-Friendly Efficiency, Flexible Installation

High Efficiency Performance

- Save Water & Money – Save up to 12,000 gallons of water from being wasted down the drain annually with the built-in recirculation pump² (RUTG-R Series models only)—that's over \$1,000 in water costs over 15 years
- Up to 1.3X the efficiency of a standard 50-gallon gas tank² – .82 UEF for non-condensing
- Up to 2.5X the lifespan of a standard 50-gallon gas tank² – With the industry's most comprehensive 15-year warranty³

Flexible Upgrade

- Industry-best ½" side-to-side and front clearance to combustibles⁶ – Provides peace of mind to install in a closet and close the door
- Easy-hang front door – Slides down and hangs for easier servicing
- Faster servicing – A Phillips screwdriver is all that's needed to disassemble the unit

Smarter Solution

Built-in Wi-Fi powered by EcoNet® technology lets homeowners control Ruud® RUTG/RUTG-R Series Tankless Water Heaters from their smartphone⁷

- Receive notifications, maintenance reminders and LeakGuard™ leak detection alerts
- Set temperature, schedule recirculation pump (if equipped), and track energy and water usage

Sustainable Solution

- Reduces carbon footprint and energy usage – The RUTG/RUTG-R Series uses up to 25% less⁴, helping minimize environmental impact
- Reduces greenhouse gas NOx emissions by up to 65%⁵ – Improving air quality




Modern Design



Ruud® RUTG/RUTG-R Series High Efficiency Non-Condensing Tankless

- **Universal venting options** – Compatible with Metal Fab, PROTECH® and UBBINK standard concentric venting
- **Industry-leading 43' vent run capability** – Ease of installation

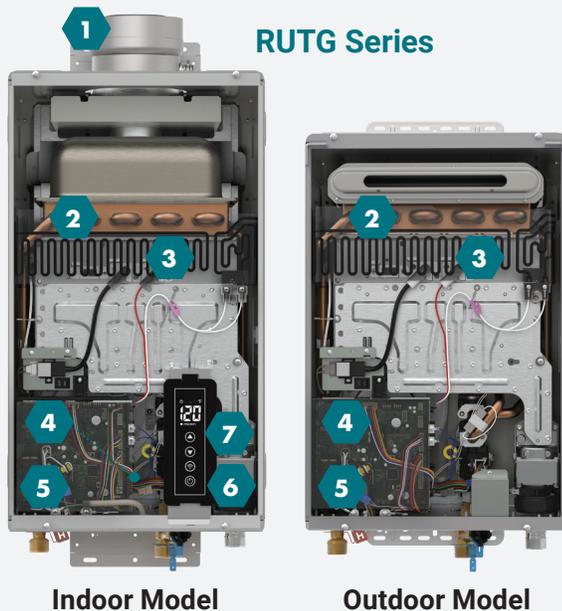

1 3"/5" concentric inlet & exhaust

2 Copper heat exchanger

3 Exclusive overheat film wrap
Designed to shut down the system in the event that the heat exchanger overheats

4 Exclusive Hot Start Programming™
Minimizes cold water bursts⁹

5 Exclusive water saving feature

6 LeakGuard™ with auto shut-off valve⁸
Detects leaks and shuts off the flow of water


7 Built-in Wi-Fi
Built-in Wi-Fi powered by EcoNet® Technology for direct control from your mobile device

8 Built-in Recirculation (RUTG-R)

How a Ruud® RUTG-R recirculation pump works

Save Water & Money – Save up to 12,000 gallons of water from being wasted down the drain annually with the built-in recirculation pump² (RUTG-R Series models only)—that's over \$1,000 in water costs over 15 years.

- 1** A hot water faucet is opened, which starts the water flow OR the built-in recirculation pump (RUTG-R Series) cycles water through the water heater.
- 2** Cold water entering the unit passes through the flow sensor, which activates the ignitor (.4 GPM). The water then flows into the heat exchanger.
- 3** The ignitor in the unit sparks before gas is introduced. The gas valve opens and sends gas to the burners to heat the water.
- 4** Heat from the flame is transferred to the water in the heat exchanger.
- 5** Hot water exits the water heater and travels to the open faucet. Once the faucet is closed, the flow sensor stops detecting the flow and the water heater goes to a ready state. Our exclusive Hot Start Programming™ feature will minimize cold water bursts if the faucet is opened again within 5 minutes.

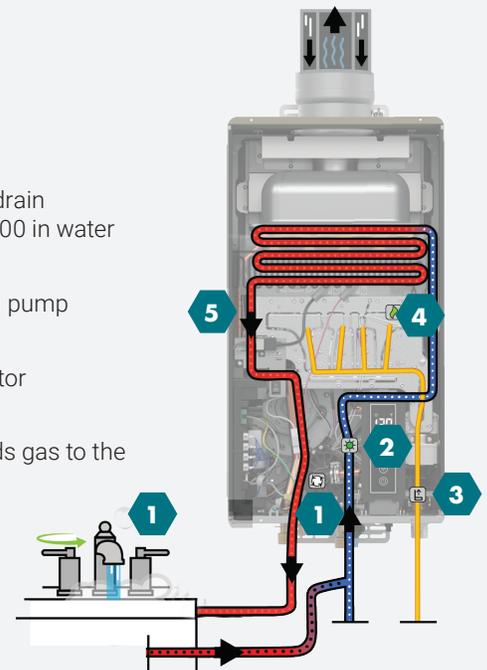

HELP YOUR CUSTOMERS START SAVING TODAY

Learn more at Ruud.com/MoreHotWater
or ask your local distributor



Ruud® RUTG/RUTG-R Series Tankless Specifications

Installation Type		Indoor						Outdoor					
Model Number		RUTG-70 DVLN-3	RUTG-84 DVLN-3	RUTG-95 DVLN-3	RUTG-95 DVELN-3	RUTG-R70 DVELN-3	RUTG-R95 DVELN-3	RUTG-70 XLN-3	RUTG-84 XLN-3	RUTG-95 XLN-3	RUTG-95 XELN-3	RUTG-R70 XELN-3	RUTG-R95 XELN-3
Gas Input Rate	MAX	160,000 BTU/h	180,000 BTU/h	199,900 BTU/h	199,900 BTU/h	160,000 BTU/h	199,900 BTU/h	160,000 BTU/h	180,000 BTU/h	199,900 BTU/h	199,900 BTU/h	160,000 BTU/h	199,900 BTU/h
	MIN	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h
Built-in Recirculation		Sold Separately				✓	✓	Sold Separately				✓	✓
Wi-Fi					✓	✓	✓				✓	✓	✓
Built-in LeakGuard™						✓	✓						
Uniform Energy Factor (UEF)		0.82											
Gallons Per Minute (GPM)	MAX (35°F)	7.0	8.4	9.5		7.0	9.5	7.0	8.4	9.5		7.0	9.5
	45°F Rise	6.0	6.7	7.4		6.0	7.4	6.0	6.7	7.4		6.0	7.4
	67°F Rise	4.5	5.1	5.0		4.5	5.0	4.5	5.1	5.0		4.5	5.0
Number of Bathrooms		2.5	3	3.5		2.5	3.5	2.5	3	3.5		2.5	3.5
Temp. Range		100°F-140°F											
Height		24.2"			25.5"			20.75"			22.03"		
Width		13.5"			13.5"			13.5"			13.5"		
Depth		10.27"			11.2"			9.4"			10.7"		
Weight (Lbs.)		46.5			53			42			47		
Temp. Setting from Factory		120°F											
Heat Exchanger Material		Copper											
Minimum Activation Flow		0.4 GPM											
Minimum Continuous Flow		0.26 GPM											
Maximum Altitude		7,800 ft.			10,200 ft.			7,800 ft.			10,200 ft.		
Ultra Low NOx		Meets 14 ng/J NOx requirements – SCAQMD Rule 1146.2 compliant											
Warranty		15-Year Heat Exchanger 5-Year Parts 1-Year Labor											

All models are available in Natural Gas or Propane (LP). For Propane replace the N with P for LP model.



CONTACT US

**Customer Service,
Warranty and Parts:**
800.621.5622

Technical Service:
800.HEATER3
(800.432.8373)

EcoNet® Support:
800.255.2388

**Plumber Support
Group:**
866.339.2388

¹Sustainability Standouts are Wi-Fi models only. ²Based on comparison of a Ruud RUTG/RUTG-R Series model against a standard residential 50-gallon tank type model with like fuel type. ³Based on comparison of Ruud RUTG/RUTG-R Series models against similar models from leading tankless competitors. ⁴Based on reduction in energy usage of RUTG/RUTG-R Series models with a 0.82 UEF compared to a standard residential 50-gallon tank type model with a 0.61 UEF. Assumes like fuel type, not to exceed 75,000 BTU. ⁵Based on comparison of Ruud RUTG/RUTG-R Series model against standard residential 50-gallon tank type model with like fuel type, not to exceed 75,000 BTU. ⁶Based on comparison of Ruud RUTG/RUTG-R Series models against similar models from leading tankless brands. ⁷Applies only to models with Wi-Fi; Wi-Fi broadband connection and EcoNet® App required; notifications are dependent on external factors beyond Ruud's control. ⁸Available on indoor Wi-Fi models only. When converting indoor Wi-Fi with LeakGuard models to outdoor, included cable and indoor mount should be used. This cable disables LeakGuard in outdoor installations to avoid false alarms and shut-off. Reference outdoor conversion instructions for more information on cable installation. ⁹Ruud is the only leading tankless manufacturer offering this technology.



In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Printed in the USA • Form No. 07.25-RU-RUTG/RUTG-R-BRO

© 2025 Rheem Manufacturing Company. Ruud trademarks owned by Ruud Manufacturing Company.